



				
Description	Forward Facing, Interior	Mini Tapered Dome, Interior	Tapered Dome, Interior	Square IR Camera, Interior
Audio Recording	-	✓	RR-CTIRA	✓
Low-Light	✓	✓	✓	RR-CIR2
Vandal-Resistant	✓	✓	✓	-
High Resolution	✓	✓	✓	✓
Wide Dynamic Range	✓	✓	✓	✓
Varifocal Lens	✓	-	-	-
Resolution, TV lines:	700	700	700	700
CCD:	1/3" Sharp CCD NVP2040 DSP	1/3" Sharp CCD NVP2040 DSP	1/3" Sharp CCD NVP2040 DSP	1/3" Sharp CCD NVP2040 DSP
S/N Ratio:	>50dB	>50dB	>50dB	>50dB
Min. Illumination (Color):	0.8 Lux	0.1 Lux	0.1 Lux	0.1 Lux / 0.8 Lux
Min. Illumination (B/W):	0.002 Lux	0 Lux	0 Lux	0 Lux / 0.01 Lux
Dimension, mm (WxHxD):	Variable*	68 x 49 x 90	94 x 70 x 130	80 x 39 x 50
Lens:	Varifocal 2.8-12mm	2.5 or 3.6mm	2.5 or 3.6mm	2.5, 3.6, 6, 8 or 12mm
Additional Features:	Fully Adjustable Mount	"Smart" IR Adjustable Audio	"Smart" IR Adjustable Audio	-
Model:	RR-CF1	Ceiling Mount 2.5mm: RR-CTMIRA25-C Side Mount 2.5mm: RR-CTMIRA25-S Ceiling Mount 3.6mm: RR-CTMIRA36-C Side Mount 3.6mm: RR-CTMIRA36-S	2.5mm: RR-CTIR25 2.5mm: RR-CTIRA25 3.6mm: RR-CTIR36 3.6mm: RR-CTIRA36	2.5mm: RR-CIR225 / RR-C225 3.6mm: RR-CIR236 / RR-C236 6.0mm: RR-CIR260 / RR-C260 8.0mm: RR-CIR280 / RR-C280 12.0mm: RR-CIR212 / RR-C212

*Please refer to the User Guide and Instruction Manual for drawings and dimensions

Camera Enclosures and Mounts



RR-CEIR Camera Enclosure
Vandal-Resistant Enclosure for RR-CIR2 Series Cameras



RR-CMIRS6 / RR-CMIRS3 Camera Mount
6" / 3" Swivel Mount for RR-C2 Series Cameras




RR-CMIRV7 Camera Mount
7" Vandal-Resistant Mount for RR-C2 Series Cameras



Description	Mini Tapered Dome, Exterior	Tapered Dome, Exterior	Wedge, Exterior
Vandal-Resistant	✓	✓	✓
High Resolution	✓	✓	✓
Wide Dynamic Range	✓	✓	✓
Varifocal Lens	-	-	✓
Resolution, TV lines:	700	700	700
CCD:	1/3" Sharp CCD NVP2040 DSP	1/3" Sharp CCD NVP2040 DSP	1/3" Sony Super HAD II CCD
S/N Ratio:	>50dB	>50dB	>50dB
Min. Illumination (Color):	0.8 Lux	0.8 Lux	0.1 Lux
Min. Illumination (B/W):	0.002 Lux	0.002 Lux	0.04 Lux
Dimension, mm (WxHxD):	68 x 49 x 90	94 x 70 x 130	103 x 92 x 172
Outdoor Rating:	IP66	IP66	IP66
Lens:	2.9mm	2.9 or 3.6mm	4 - 9mm Varifocal
Additional Features:	UV Coated Dome	UV Coated Dome	Tempered Glass (Optional)*
Model:	Ceiling Mount: RR-CTM-C Side Mount: RR-CTM-S	2.9mm: RR-CT29 3.6mm: RR-CT36	Curbside: RR-CW1-CS Streetside: RR-CW1-SS Forward View: RR-CW1-FV Curbside: RR-CW1-TG-CS* Streetside: RR-CW1-TG-SS* Forward View: RR-CW1-TG-FV*

Sample Camera Placement

5 Camera System

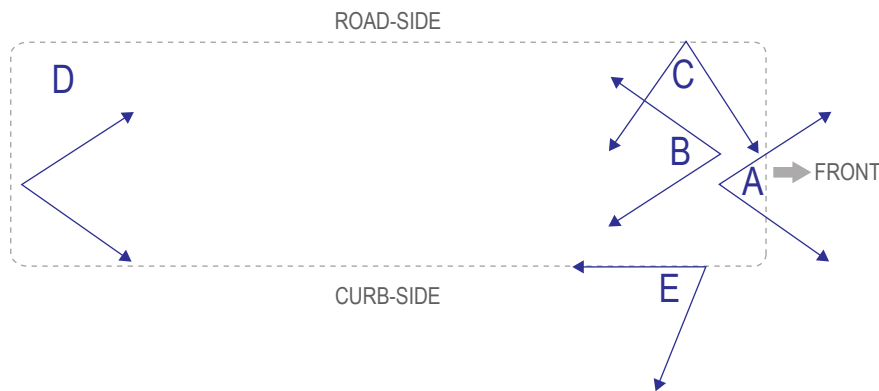

24000-35th Avenue Southeast - Bothell, WA 98021-8990
Toll Free: 888-AVT-USA1; Tel: 425-483-7100; Fax: 425-483-7200
sales@apollovideo.com | www.apollovideo.com